




# DM200

## Digital Multimeter

### **FAST & ACCURATE CHECKS OF VOLTAGE, CONTINUITY OR RESISTANCE**

- 600 Volts AC & DC
- Continuity
- Resistance to 200 ohms
- Manual ranging
- 3-1/2" digit, 2000 count display

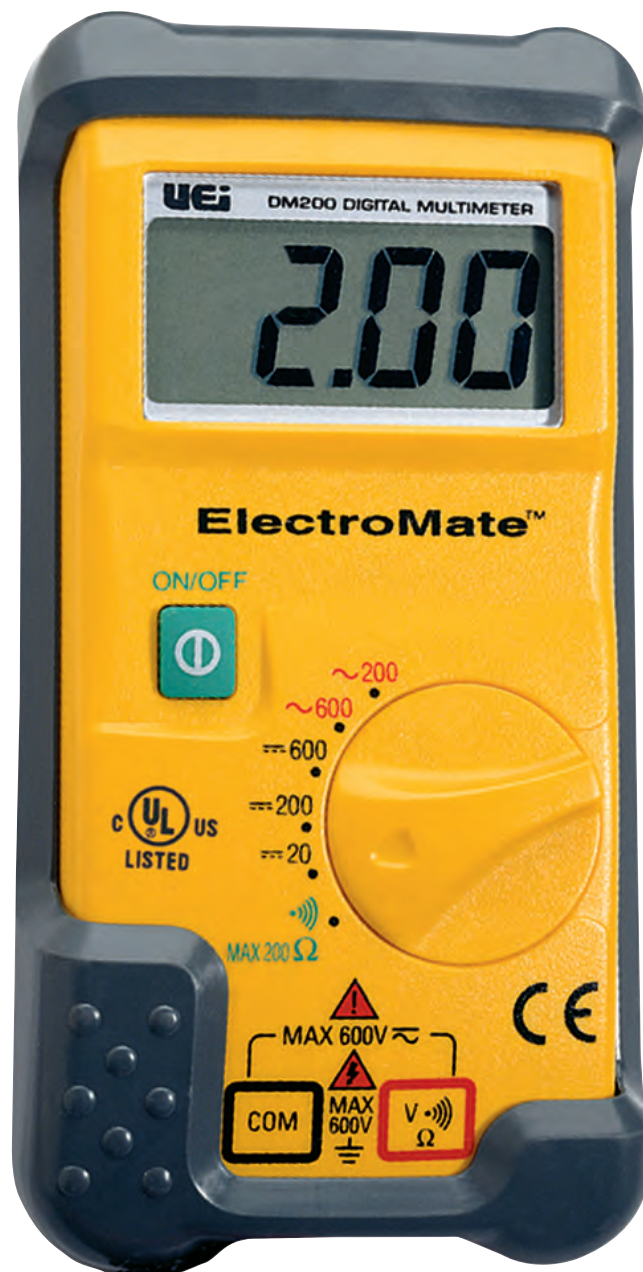


# DM200 • Digital Multimeter

The DM200 ElectroMate™ is an economical digital multimeter that you can use for fast and sure checks of voltage, continuity or resistance.

**The DM200 has the following features:**

- 600 Volts AC & DC
- Continuity
- Resistance to 200 ohms
- Manual ranging
- 3-1/2" digit, 2000 count display
- UL and CE listed CAT II
- One year limited warranty

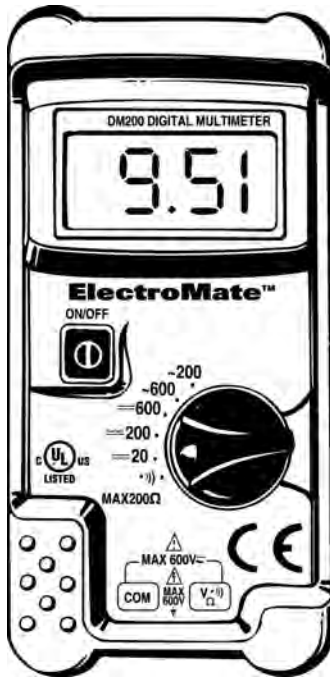

## Specifications

|  |  |
|--|--|
| Max. voltage between any terminal and earth ground | 600V   |
| Digital Display                                    | 3-1/2 digits, 2000 counts with automatic polarity indication |
| Reading Time                                       | 2-3 readings per second                                      |
| Input Impedance                                    | 10MΩ   |
| Storage Temperature                                | 14° to 122°F (-10° to 50°C)                                  |
| Operating Temperature                              | 32° to 104°F (0° to 40°C)                                    |
| Battery Type                                       | 9V, NEDA 1604 or IEC 6LR61                                   |
| Battery Life                                       | 200 hours  |
| Size (H x W x L)                                   |  |
| Without boot                                       | 36 x 70 x 140 mm   |
| With boot  | 54 x 80 x 154 mm   |
| Weight   |  |
| Without boot                                       | 220 g (7.7 oz)   |
| With boot  | 380 g (13.4 oz)  |

## Electrical Specifications

| Function                  | Range | Resolution | Accuracy       | Overload Protection |
|---------------------------|-------|------------|----------------|---------------------|
| DC V                      | 20 V  | 100 mV     | ±1.5% + 3 dgts | 600 V               |
|                           | 200 V | 10 mV      |                |                     |
|                           | 600 V | 1 V        |                |                     |
| AC V<br>(45 HZ TO 450 HZ) | 200 V | 10 MV      | ±1.5% + 5 dgts | 600 V               |
|                           | 600 V | 1 V        |                |                     |
| Resistance                | 200 Ω | 0.1 Ω      | ±1.5% + 3 dgts | 600 V               |

Distributed By:



1-800-547-5740 • Fax: (503) 643-6322  
www.ueitest.com • Email: info@ueitest.com

### IN CANADA

Vancouver: Phone: 1-877-475-0648 • (604) 278-4511 • Fax: (604) 278-8299  
Toronto: Phone: 1-877-475-0648 • Fax: (905) 238-5117

### IN EUROPE

Phone: +44 1707 375550 • Fax: +44 1707 393277

